

Current Probe Model PR430

The PR430 current probe is based on Hall Effect technology for use in measurement of both DC and AC current. The PR430 may be used in conjunction with oscilloscopes and other suitable recording instruments for accurate non intrusive current measurement.



Electrical Characteristics

Current Ranges	: 40 A and 400 A AC _{RMS} or DC
Measuring Ranges	: +/- 60 A and +/- 600 A
Output Sensitivity	: 10 mV/A (40 A)
.....	: 1 mV/A (400 A)
Accuracy.....(40A range)	: +/- 1% of reading +/- 50 mA
.....(400A range)	: +/- 1% of reading +/- 300 mA
Resolution	: +/- 50 mA (40 A)
.....	: +/- 100 mA (400 A)
Load Impedance	: > 10 k Ohms and ≤ 100 pF
Conductor Position Sensitivity.....	: +/- 1.5% relative to centre reading
Frequency Range.....(small signal).....	: DC to 20 kHz (- 2 dB)
Phase Shift below 2 kHz	: < 2 degrees
Temperature Coefficient.....	: +/- 0.1% of reading / °C
Power Supply	: 9 V Alkaline, MN1604/PP3
.....	: 40 Hours, low battery indicator
Working Voltage (see Safety Standards section).....	: 300 V AC _{RMS} or DC

General Characteristics

Maximum Conductor Size	: 19 mm diameter
Output Connection	: safety BNC connector
Output Zero	: Manual adjust via thumbwheel
Cable Length.....	: 2 meters
Operating Temperature Range	: 0 to +50 °C
Storage Temperature Range (with battery removed)	: -20 to +85 °C
Operating Humidity.....	: 15% to 85% (non condensing)
Weight.....	: 250 g

Safety Standards

BSEN61010-1: 1993 and Amendment A2: July 1995

BSEN61010-2-032: 1995

BSEN61010-2-031: 1995


300 V_{RMS}, Category III, Pollution Degree 2

Use of the probe on **uninsulated conductors** is limited to 300 V AC_{RMS} or DC and frequencies below 1 kHz.

EMC Standards

EN61236 :1998

Dimensions

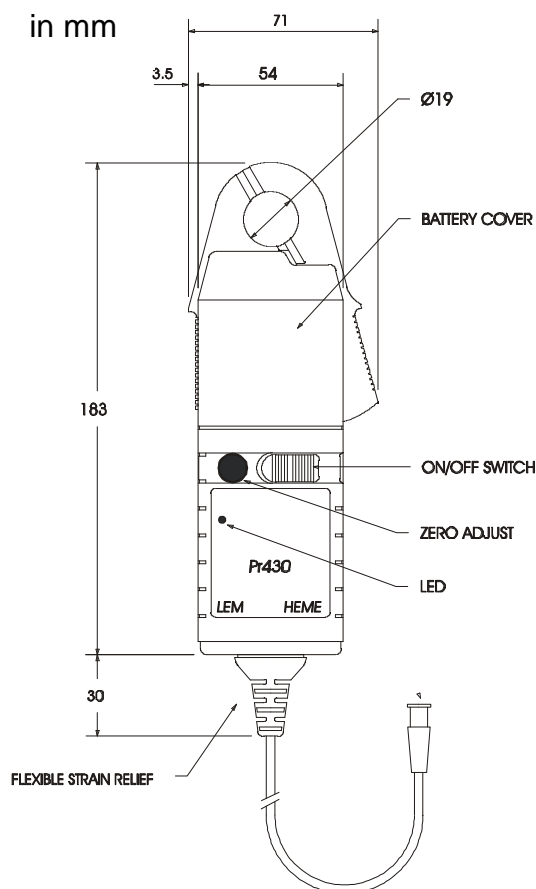

Editor	
Name	
Signature	
Date	
Verified	
Name	
Signature	
Date	